



DMXD & DMXS SLANTED OPEN AIR MERCHANDISERS



DESIGNED SMART. BUILT SOLID.®

APW
wyott®

**Eye-
Catching**

Open

Smart

Eye-catching, attractive appearance beckons customers to open display of heated product.

Open, slanted shelf design is easily accessible, encouraging selection and purchase.

Smart base and infrared heating system keep product NSF safe.



Slanted Open Air Merchandiser

Holds a variety of products

on one or two shelf models, from 24" of displayable area (DMX-30S styles) to 54" displayable area (DMX-60S styles).

Unique "curtain of heat" design

concept means the front edges of the merchandiser stays at a consistent temperature.

A perfect "front of the house" system,

it has powder coated front and side accents compliment your operation's décor. The Racer® line comes standard with a black front with red channel insets along with a red side panel, and is available in a variety of other colors.




Inset panels for the front match side color panel and can be used for product identification signs or price markers.

Practical design features include heavy duty stainless steel construction for base, sides and top. Unit will not sway from side to side or sag in the middle.

Hard coated aluminum heat shelf, and 1-1/2" insulation throughout shelf base minimize heat transfer to external environment.



Dimensions

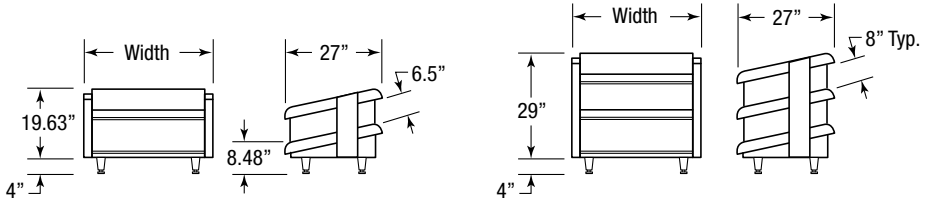

Model	Width	Height	Depth
DMXD-30S	30"	23 2/8"	27"
DMXD-36S	36"	23 2/8"	27"
DMXD-42S	42"	23 2/8"	27"
DMXD-48S	48"	23 2/8"	27"
DMXD-54S	54"	23 2/8"	27"
DMXD-60S	60"	23 2/8"	27"

Model	Width	Height	Depth
DMXS-30S	30"	33"	27"
DMXS-36S	36"	33"	27"
DMXS-42S	42"	33"	27"
DMSX-48S	48"	33"	27"
DMXS-54S	54"	33"	27"
DMXS-60S	60"	33"	27"

Specifications

Construction

Stainless steel top, back, sides and base. Hard coated aluminum heated shelves. Front and back channels - powder coated aluminum. Tempered glass end panels.

Electric

72" power cord. 5-15 or 14-20P plug, depending on unit size.

Model	Volts	Watts	Amps
DMXD-30S	120	1340	11.5
DMXD-36S	120	1640	14
DMXD-42S	120	1915	16.5
DMSD-48S	208/120	2430	9.5
DMXD-54S	208/120	2705	13
DMXD-60S	208/120	3005	14.4

Model	Volts	Watts	Amps
DMXS-30S	120	695	5.75
DMXS-36S	120	845	7
DMXS-42S	120	995	8.2
DMSX-48S	120	1240	0.3
DMXS-54S	120	1390	11.5
DMXS-60S	120	1540	12.8

Capacity

Height: 6 1/2" between each shelf

Depth of each shelf: 22"

Length: All display areas are 6' less than the overall width of the designated unit.

Shipping

DMXS-30S 150lbs DMXD-30S 195lbs

DMXS-36S 161lbs DMXD-36S 215lbs

DMXS-42S 179lbs DMXD-42S 235lbs

DMSX-48S 198lbs DMSD-48S 260lbs

DMXS-54S 208lbs DMXD-54S 270lbs

DMXS-60S 226lbs DMXD-60S 280lbs

Freight Class: 125

FOB: Cheyenne WY 82007

APW Wyatt Foodservice Equipment Company

1307 N. Watters Drive, Suite 180, Allen, TX 75013

(800) 527-2100 • (972) 908-6100 • Fax (214) 565-0976

www.apwwyott.com • customercare@standexcsg.com

© 2014 APW Wyatt®
All rights reserved.

APW
wyott