



DOUBLE OVERHEAD CALROD WARMERS

MODELS: FDDH, FDDL



APW Wyott Double Overhead Calrod Warmers provide a streamlined option for warming prepared food on the cookline. Our standard warmers deliver 22% more heat to food than competitive models, while our high watt models deliver 15% more power than competitive models.

The FDD and FDDL warmers are available in a wide range of lengths, with or without lighting, toggle switch, or infinite control with the option for remote on/off.

OPTIONS & ACCESSORIES

- Remote control box pilot light switch box, control and cover with single, dual, or triple controls
- Tubular stand kit with 1 pair legs for permanent mounting (48" or smaller units only)
- Cord & plug set for portability, includes adapter bushing. (120V units, 48" and smaller only)
- Chain supports for overhead suspension without flush mount (requires double the length vs. singles)

CERTIFICATIONS

Certified by the following agencies:



WARRANTY

APW Wyott overhead warming equipment is backed by a 2 year warranty on heating elements and a 1 year parts and labor warranty

FEATURES AT A GLANCE

- Delivers over 22% more heat to your prepared food than competitive models
- Unique heating system provides the highest wattage in the category. High watt version has 15% more power than competition
- Aluminized steel reflectors behind heating elements radiate more heat toward food
- Stainless steel construction resists corrosion, is easy to clean, and presents an attractive appearance
- Control components are insulated in a ventilated box
- All units come standard with sturdy stainless steel mounting brackets
- Select how to support your overhead warmers with t-leg stands, tubular post mount stand, or chain suspension
- Extra electrical conduit knockout locations allow flexibility in installation
- Available with either an infinite or toggle control that can be supplied within the unit or in a remote control box. Installer provides wiring between remote control box and unit.






DOUBLE OVERHEAD CALROD WARMERS

MODELS: FDDH, FDDL

EQUIPMENT DIMENSIONS

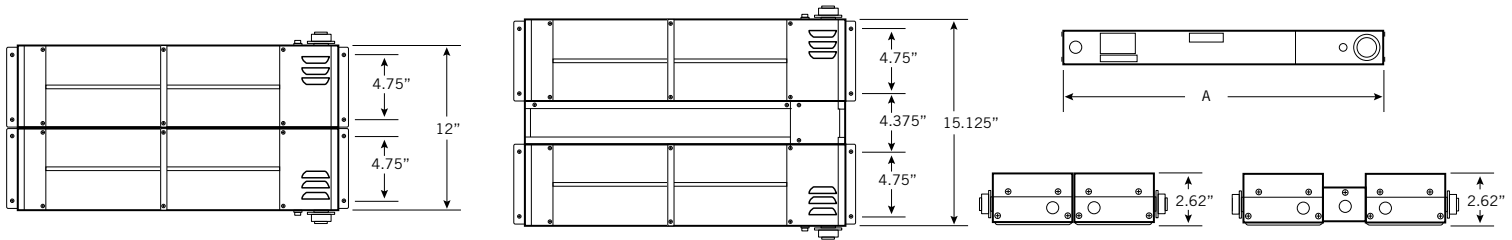

MECHANICAL SPECIFICATIONS

Model #	Width	Watts	Overall Dimensions Width (A) x Height* x Depth**	Ship Weight	Model #	Width	Watts	Overall Dimensions Width (A) x Height* x Depth**	Ship Weight
FD - High Wattage Non-Lighted	18"	800	19.55" x 3.5" x 12"	11 lbs.	FDL - High Wattage Lighted	18"	880	19.55" x 3.5" x 15.125"	12 lbs.
	24"	1,150	25.55" x 3.5" x 12"	15 lbs.		24"	1,230	25.55" x 3.5" x 15.125"	16 lbs.
	30"	1,520	31.55" x 3.5" x 12"	17 lbs.		30"	1,600	31.55" x 3.5" x 15.125"	18 lbs.
	36"	1,840	37.55" x 3.5" x 12"	20 lbs.		36"	2,000	37.55" x 3.5" x 15.125"	21 lbs.
	42"	2,200	43.55" x 3.5" x 12"	23 lbs.		42"	2,360	43.55" x 3.5" x 15.125"	24 lbs.
	48"	2,530	49.55" x 3.5" x 12"	23 lbs.		48"	2,690	49.55" x 3.5" x 15.125"	24 lbs.
	54"	2,850	55.55" x 3.5" x 12"	27 lbs.		54"	3,010	55.55" x 3.5" x 15.125"	28 lbs.
	60"	3,220	61.55" x 3.5" x 12"	29 lbs.		60"	3,460	61.55" x 3.5" x 15.125"	30 lbs.
	66"	3,600†	67.55" x 3.5" x 12"	33 lbs.		66"	3,840†	67.55" x 3.5" x 15.125"	34 lbs.
FD - Low Wattage Non-Lighted	72"	3,960†	73.55" x 3.5" x 12"	35 lbs.	FDL - Low Wattage Lighted	72"	4,200†	73.55" x 3.5" x 15.125"	36 lbs.
	18"	500	19.55" x 3.5" x 12"	11 lbs.		18"	580	19.55" x 3.5" x 15.125"	12 lbs.
	24"	700	25.55" x 3.5" x 12"	15 lbs.		24"	780	25.55" x 3.5" x 15.125"	16 lbs.
	30"	900	31.55" x 3.5" x 12"	17 lbs.		30"	980	31.55" x 3.5" x 15.125"	18 lbs.
	36"	1,150	37.55" x 3.5" x 12"	20 lbs.		36"	1,310	37.55" x 3.5" x 15.125"	21 lbs.
	42"	1,350	43.55" x 3.5" x 12"	23 lbs.		42"	1,510	43.55" x 3.5" x 15.125"	24 lbs.
	48"	1,600	49.55" x 3.5" x 12"	23 lbs.		48"	1,760	49.55" x 3.5" x 15.125"	24 lbs.
	54"	1,850	55.55" x 3.5" x 12"	27 lbs.		54"	2,010	55.55" x 3.5" x 15.125"	28 lbs.
	60"	2,100	61.55" x 3.5" x 12"	29 lbs.		60"	2,340	61.55" x 3.5" x 15.125"	30 lbs.
	66"	2,320†	67.55" x 3.5" x 12"	33 lbs.		66"	2,560†	67.55" x 3.5" x 15.125"	34 lbs.
	72"	2,550†	73.55" x 3.5" x 12"	35 lbs.		72"	2,790†	73.55" x 3.5" x 15.125"	36 lbs.


*Height includes 1" mounting bracket. Depth does not include toggle switch, infinite control, or remote box depth. † Sizes above 60" are only available in 208/240V versions.

REQUIRED CLEARANCES

	Combustible
Top	1" (25 mm)
Sides	2" (51 mm)
Back	2" (51 mm)

ELECTRICAL INFORMATION

Specify voltage and wattage; also, infinite control or toggle switch (remote control units that are operated by optional remote control kits). Remote control units use separate/optional remote control kits to allow for maximum installation flexibility. Up to 3 remote units can be controlled by a single triple remote control kit.



Freight Class: 100 Sizes 60" and above ship LTL only FOB: Allen, 75013

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.